A photograph of a data center interior. The ceiling is a complex structural grid system with various metal beams and supports. Below the ceiling, several server racks are visible, filled with server units. The floor is a light-colored, reflective surface. The overall lighting is bright and clean.

# SAS 385 Nexus

Structural Grid Ceiling  
Solution for Data Centres

# Introduction

SAS385 Nexus is our highest performing structural grid ceiling, capable of supporting a wide range of heavy utilities in a data hall environment.

The heavy duty aluminium grid is quick and easy to install and can be used in multiple configurations, making it ideal for data centre specifications.

SAS has a renowned reputation for quality and manufacturing excellence, spanning more than 50 years. SAS385's combination of structural grid and robust durable ceiling tiles creates a strong yet simple assembly lasting decades to come.



## ADVANTAGES

---

Fast and flexible installation

---

Capable of supporting higher loads than other structural grid systems

---

Rated for lateral stability

---

Multiple grid configurations for added flexibility

---

Requires less grid than other systems thanks to its innovative design

---

Continuous channel feature suitable for use with standard Unistrut fixings

---

Services can be supported below or upon grid depending on requirements

---

Safety factor of 2 for all connections

---

BIM Support Available

---

Service life of 40 years plus

---



UKAS accredited testing

---

# System Perspective View

1. M10 Threaded Rod (by others)
2. M10 Turnbuckle
3. M10 Engineers Stud
4. M10 Unistrut Channel Nut PNP10
5. M10 Nut & M10x40x1.5mm Washer (by others)
6. Aluminium Main Profile 3600mm, RAL 9010
7. Aluminium Cross Noggin 1140mm, RAL 9010
8. DC90 – Removable Angle Splice (LH/RH)
9. DC180 – Straight Splice
10. Tek Screw 4.2mm x 13 Waferhead (by others)
11. Plain Infill Tile
12. Perimeter Profile
13. Integrated air-tight gasket (fast installation)

Tile Hold Down Clip (optional)

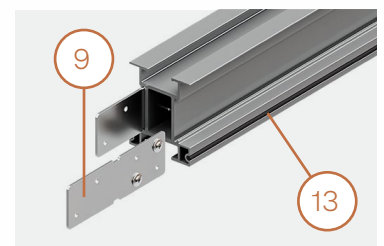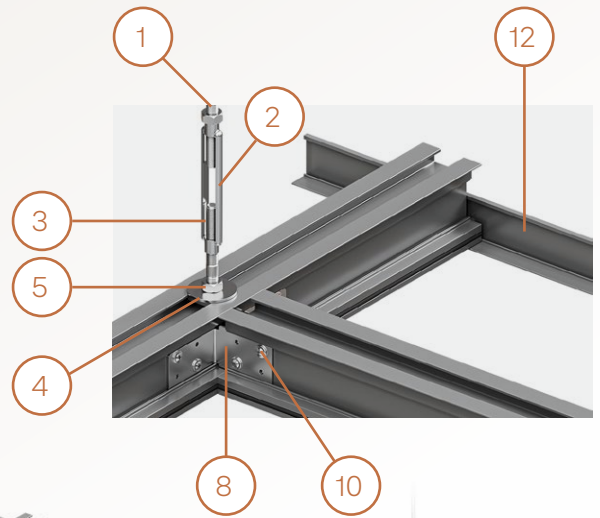

- Factory engineered heavy duty aluminium ceiling grid with continuous channel slot compatible for use with standard Unistrut fixings.
- Simple grid arrangement consisting of structural main runners and cross tees installed using heavy duty splice connectors.
- Load performance criteria for a 1200x1200 grid:
  - Safe working point load of 4.8kN
  - Safe working uniform load of 6.5kN/m<sup>2</sup>


# Grid Specification

SAS385 Nexus grid is comprised of main runners and structural cross tees assembled using heavy duty splice connectors which are located in a specially designed keyway feature.


Nexus profile is designed to use a M10 turnbuckle assembly.

The continuous channel slot is compatible for use with standard Unistrut fixings.

The SAS385 Nexus profile has been designed so it can be used with both metal or mineral fibre tiles, depending on the project requirements.

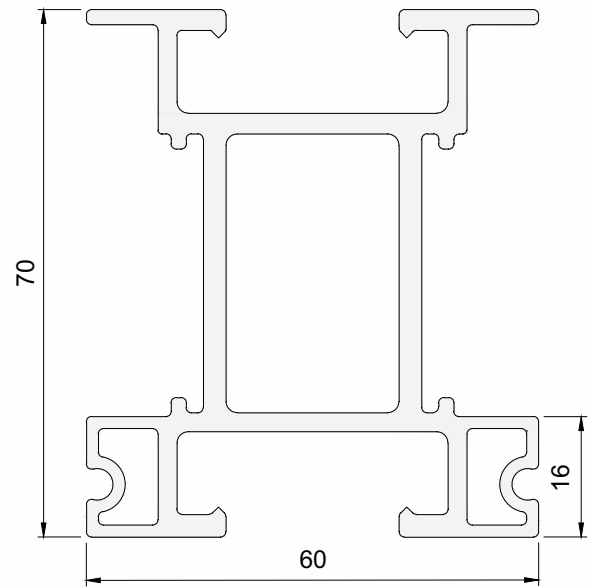


Scale 1:1

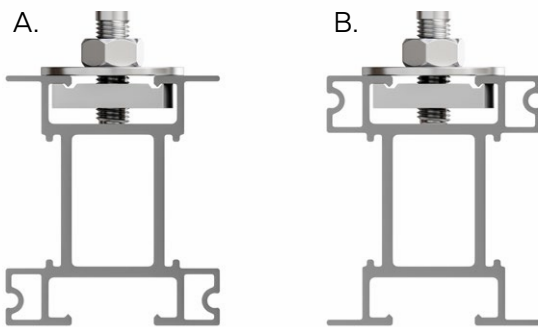

Nexus Profile installation for metal tile

Nexus Profile installation for mineral tile

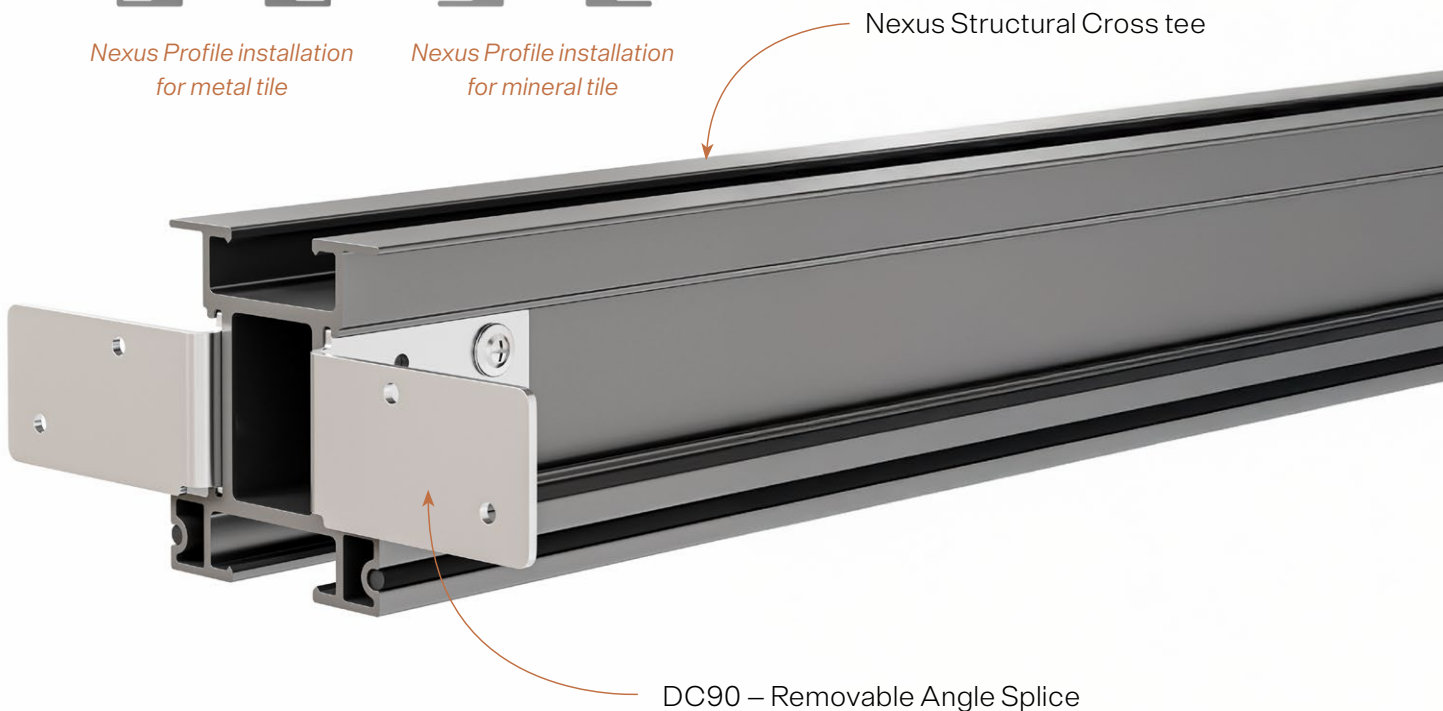


Nexus Structural Cross tee

DC90 - Removable Angle Splice

# Grid Specification


## Main Runner Splice Detail

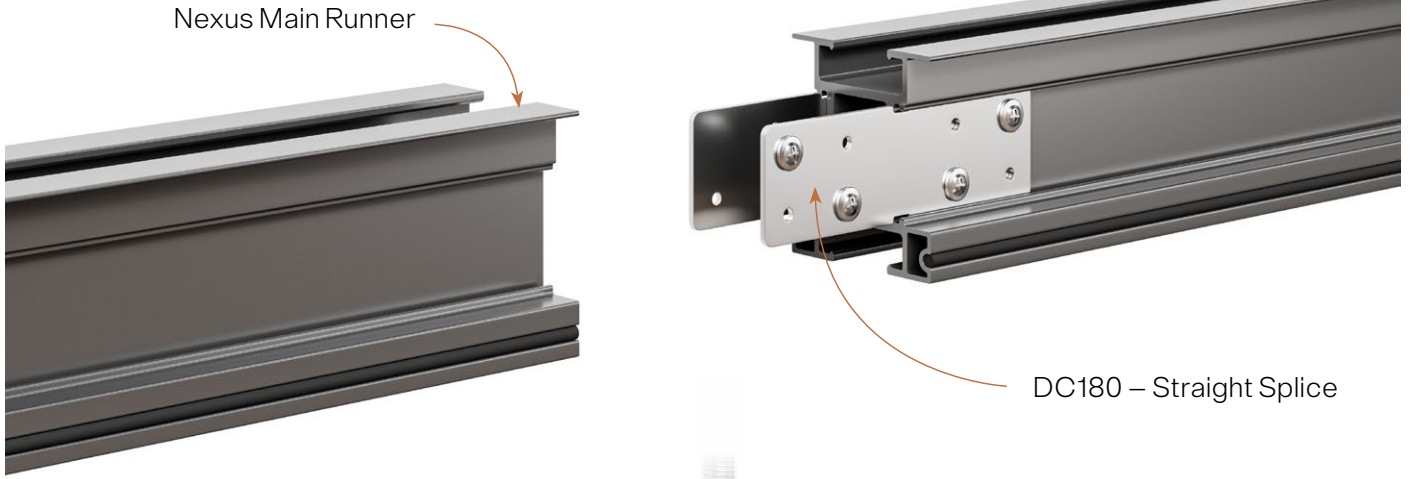

## Typical Suspension Detail



Structural Grid Node  
Intersection

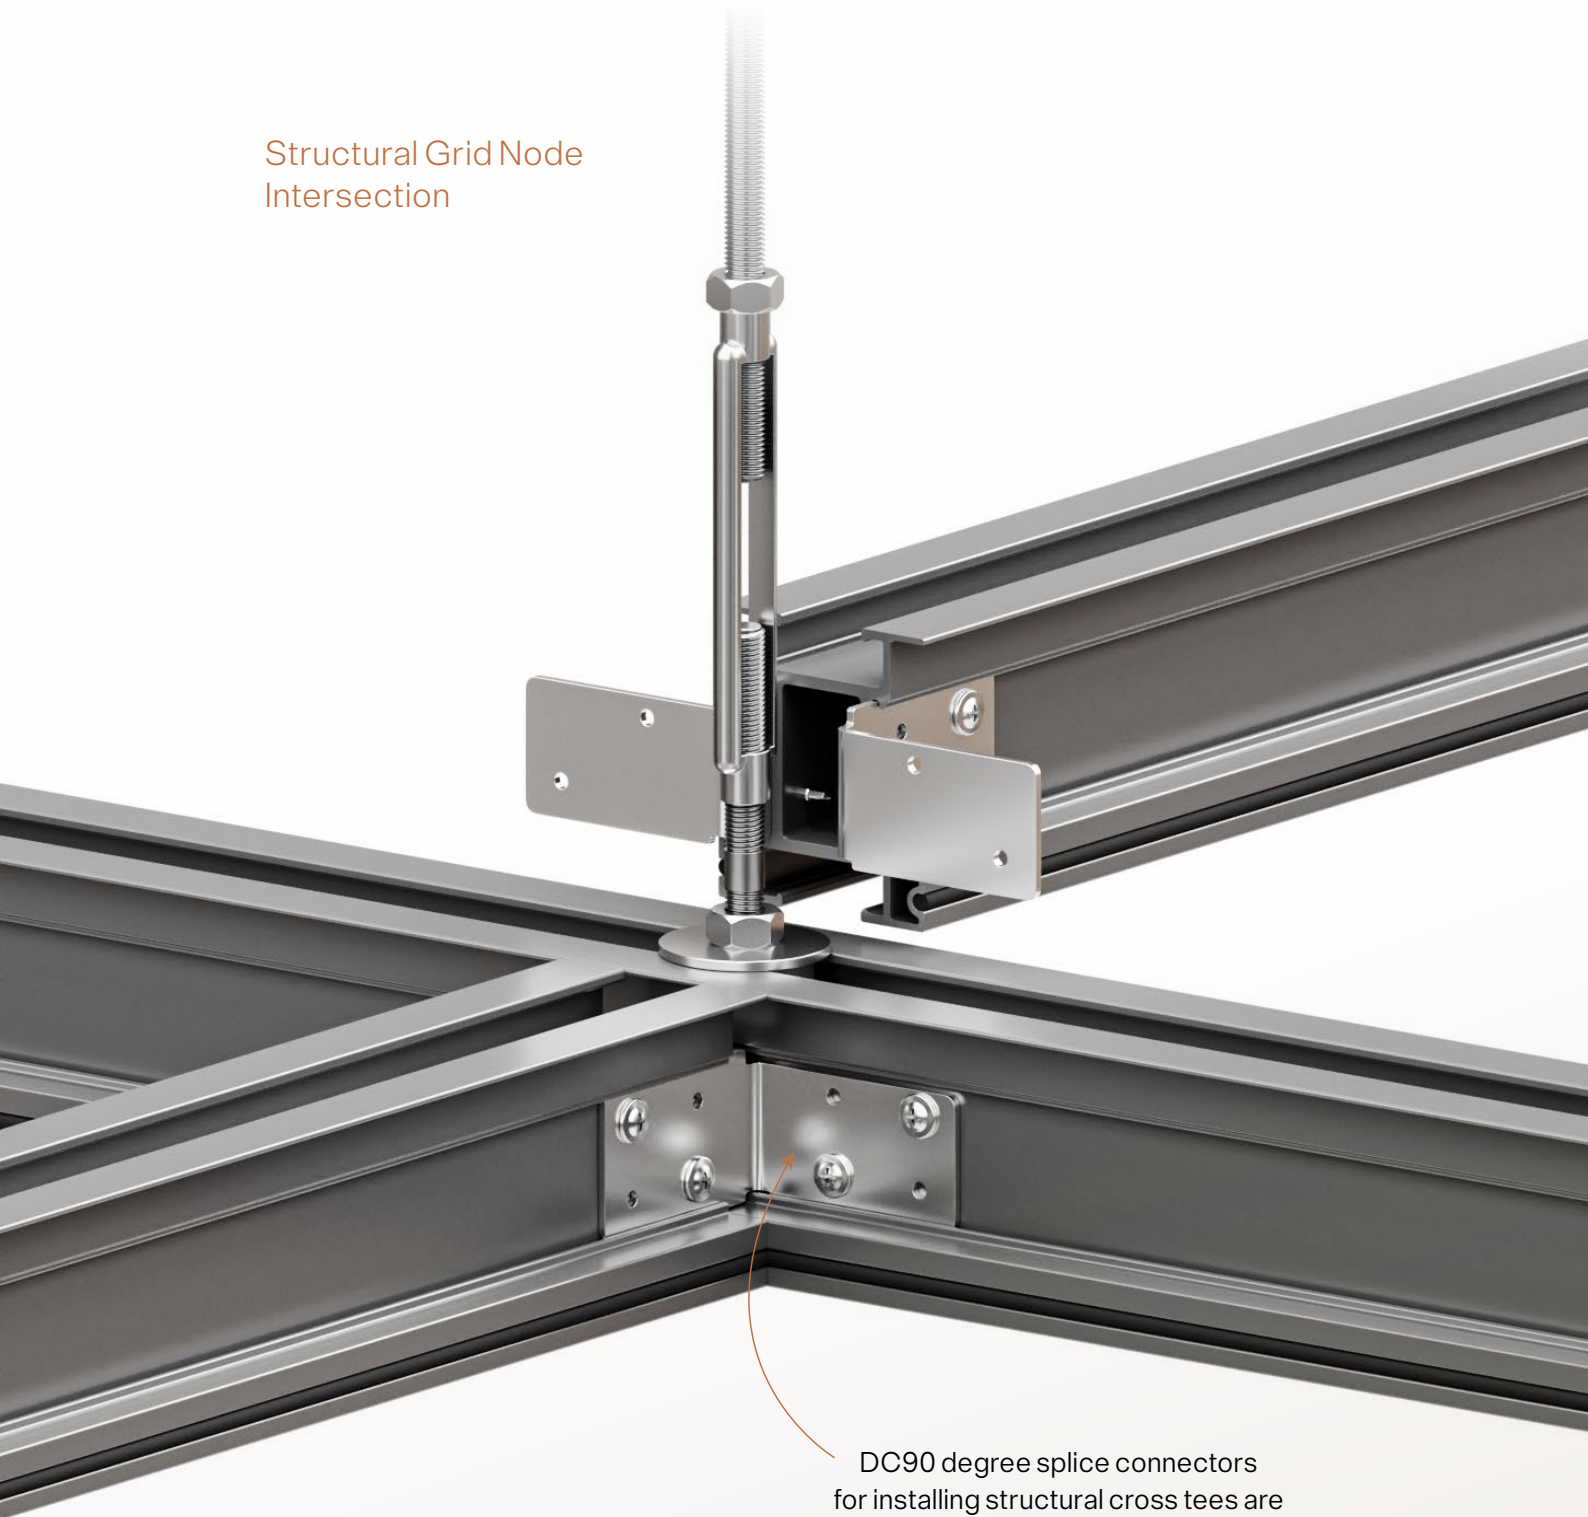

DC90 degree splice connectors  
for installing structural cross tees are  
removeable allowing easy positioning  
and in-situ adjustment.

# Structural Performance


## SYSTEM PERFORMANCE CRITERIA

Hanging Method	Grid Load Performance (with structural connections and 1.2 x 1.2m centres) <sup>1</sup>	Connection to Bottom Slot <sup>2</sup>	Connector to Grid
Safe Working Point Load <sup>3</sup>	4.8kN @ 6mm deflection		4.8kN <sup>4</sup>
Safe Working Uniform Load <sup>3</sup>	6.5kN/m <sup>2</sup>		N/A
Ultimate Point Load	9.6kN		9.6kN

- <sup>1</sup> Load can be placed anywhere on the ceiling including the noggin. Mid-span maximum point load no less than 1.2m apart in any direction
- <sup>2</sup> Load support no further than 100mm from rod connector
- <sup>3</sup> Factor of Safety of 2 applied
- <sup>4</sup> The safe working point load applied to hanger is limited to 4.6kN when a turnbuckle connection is used

## MID-SPAN POINT LOAD

Maximum mid-span point load for continuous main runner or cross noggin with adjacent 1.2m spans loaded. For section properties, please see Technical Datasheet.

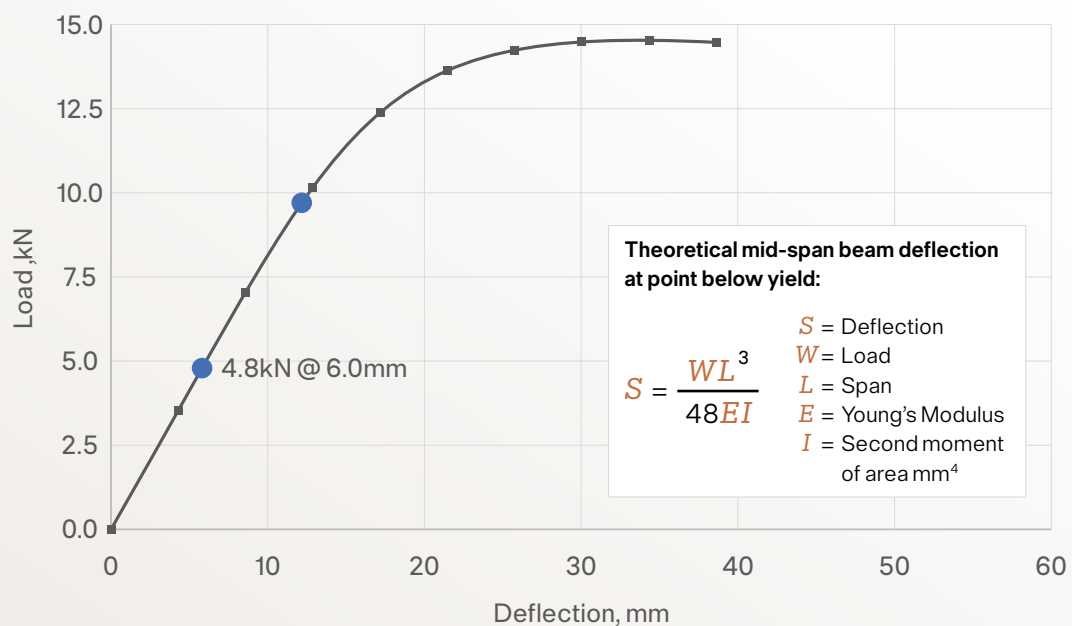



## LATERAL STABILITY


For a 1.2m x 1.2m grid, the following maximum lateral loads could be applied based on a length divided by 200 (L/200) mid-span deflection. It should be noted, the system resists larger values if the lateral restraint is located close to the point load. Further information can be provided upon request.

Lateral Resistance	Maximum Lateral Load @ L/200
Every other hanger position (2.4m max)	1.0kN
Every third hanger position (3.6m max)	0.5kN

## SPAN TABLE

For use when a member span and spacing greater than 1200mm is used

Member Span and Spacing, Dim 'X'	1200mm	1500mm	1800mm	2100mm	2400mm
Maximum Allowable Uniform Area Load <sup>1</sup>	6.5kN/m <sup>2</sup>	4.1kN/m <sup>2</sup>	2.8kN/m <sup>2</sup>	1.8kN/m <sup>2</sup> *	1.2kN/m <sup>2</sup> *
Maximum Mid-Span Point Load <sup>1</sup>	4.8kN	3.8kN	3.1kN	2.7kN	2.2kN
Maximum Static Point Load <sup>2</sup>	4.8kN	4.8kN	4.8kN	4.8kN	4.8kN

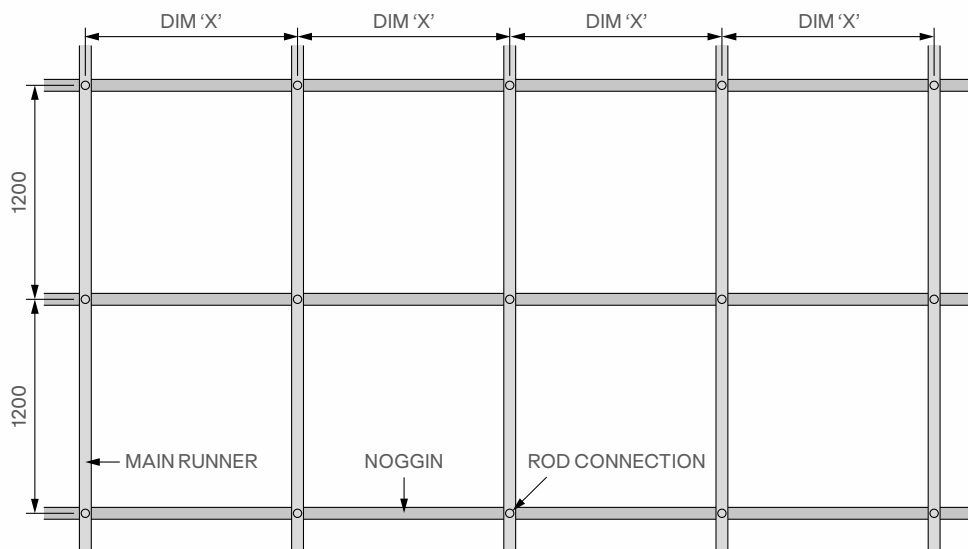


- <sup>1</sup> Values marked with an asterisk are governed by a deflection limit of L/100
- <sup>2</sup> Load when applied to bottom slot for spans >1500mm is dependent on relative position of hanger

# SAS385 Nexus Profile & Perimeter Options

Nexus is designed to allow fixed or floating perimeter options. Where required, tiles can be cut on site for improved installation by using standard SAS perimeter profiles.


## Fixed Perimeter

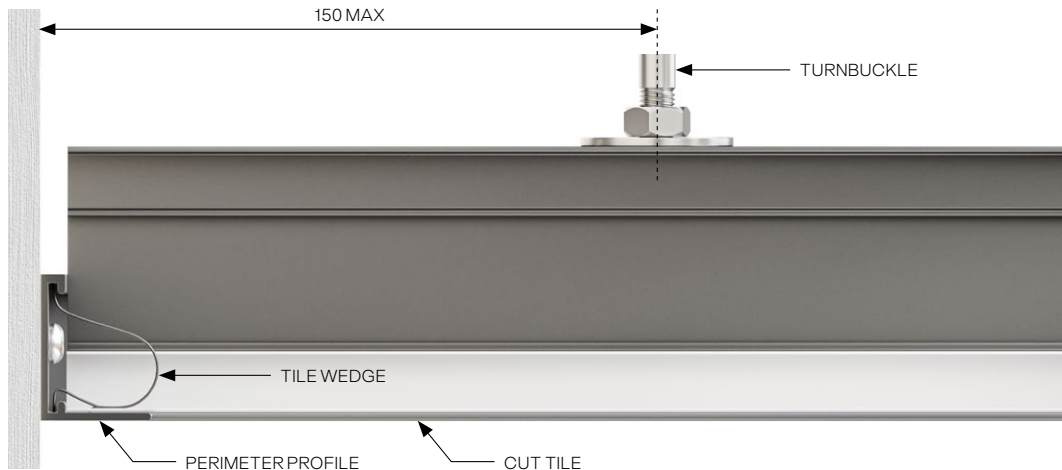

The Nexus profile can be used with support connections when installing a floating perimeter and is easily cut on site to suit site conditions.

Wall angles can be used to improve perimeter detailing.

## Floating Perimeter

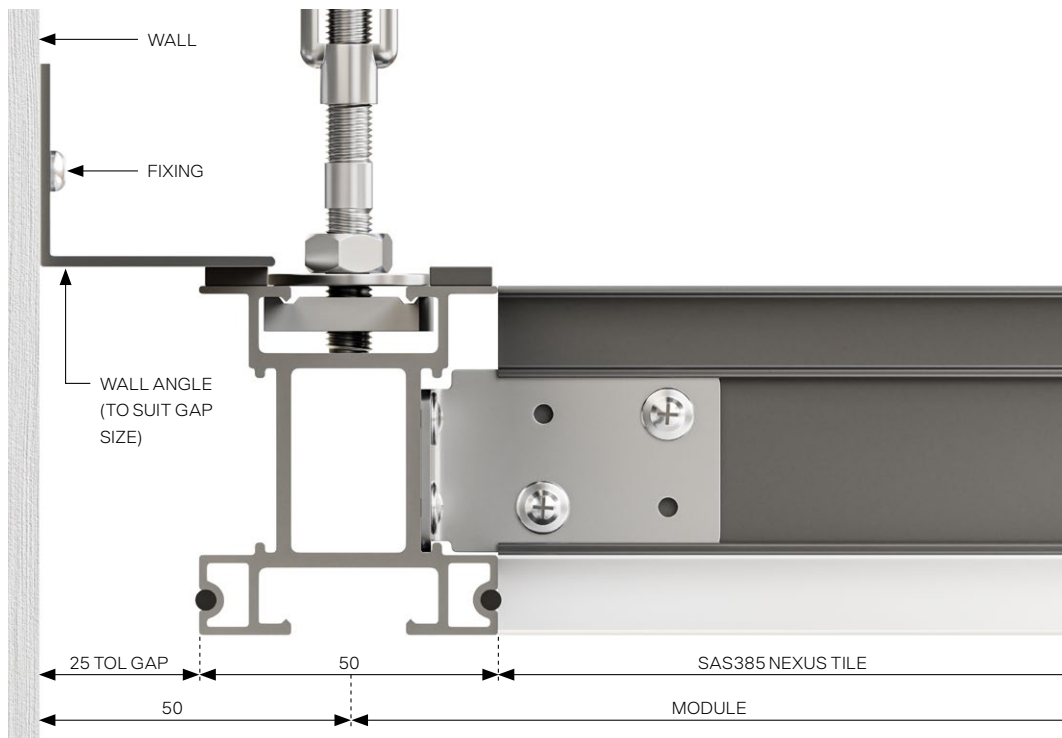

# Ceiling Module Sizes & Installation Guidance


## SYSTEM WEIGHT

Module Size	Tile Included	Weight
1200x1200mm	No	4.0kg/m <sup>2</sup>
1200x600mm	No	6.0kg/m <sup>2</sup>
1200x1200mm	Yes (steel)	10.0kg/m <sup>2</sup>
1200x600mm	Yes (steel)	12.0kg/m <sup>2</sup>




## Step 1

Threaded drop rods and turnbuckle assemblies are installed to building structure using suitable fixings.

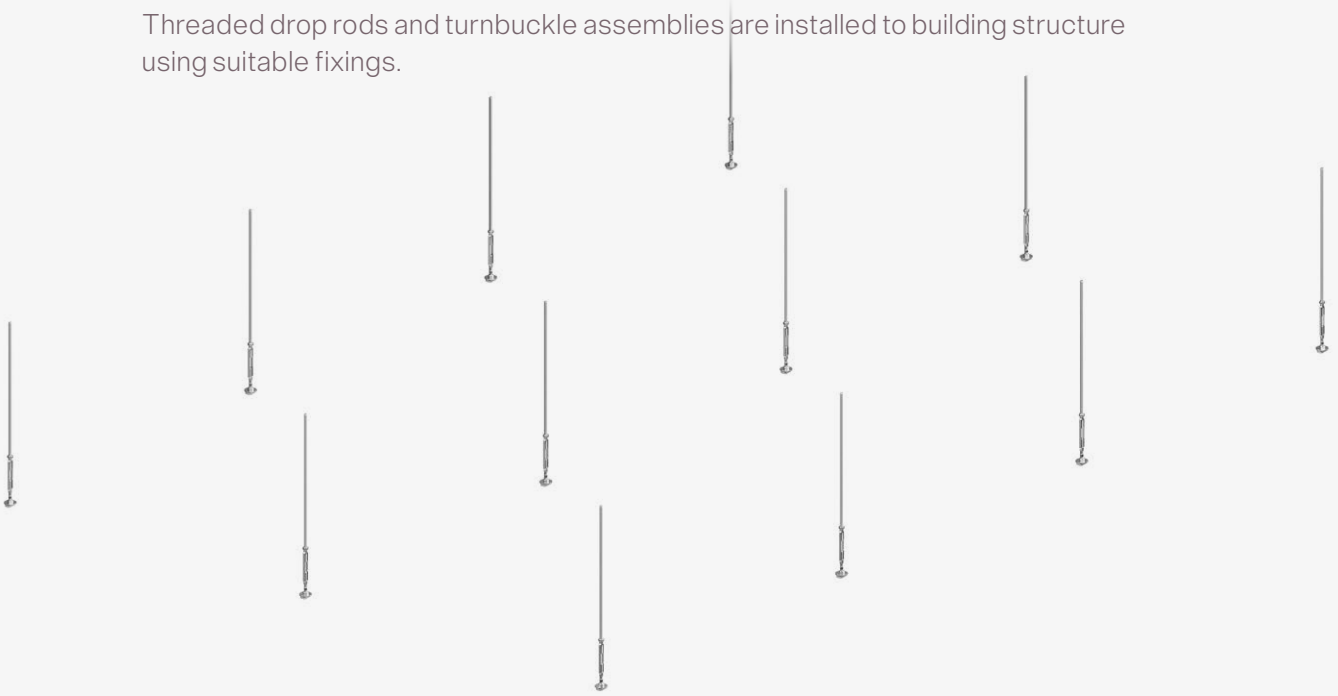


## Step 2

Main runners are installed at 1200mm centres and are fixed together using straight splice connectors.

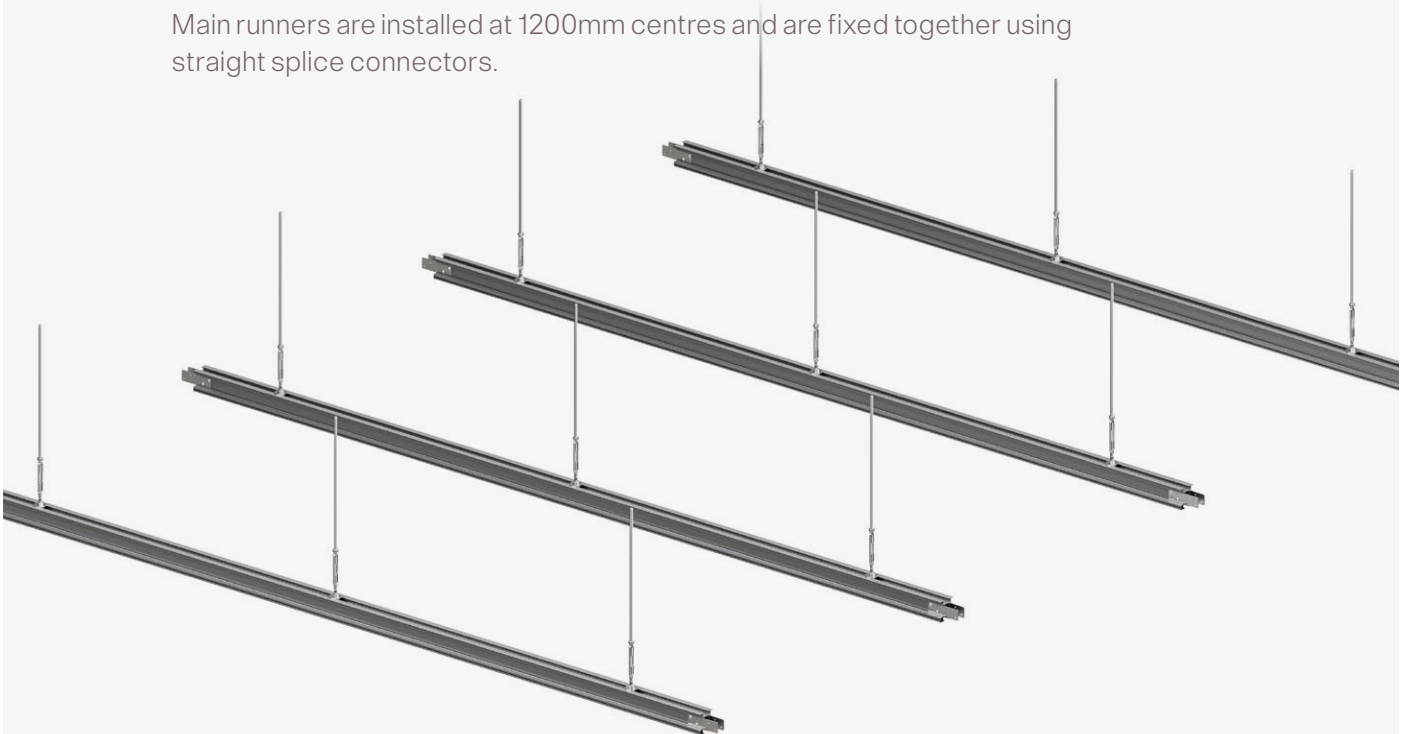


## Step 3

Structural cross tees are installed along main runners at 1200mm centres using removable angle splice connectors which locate into the specially designed keyway of the Nexus profile. Cross tees can be slid and adjusted into position prior to fixing.

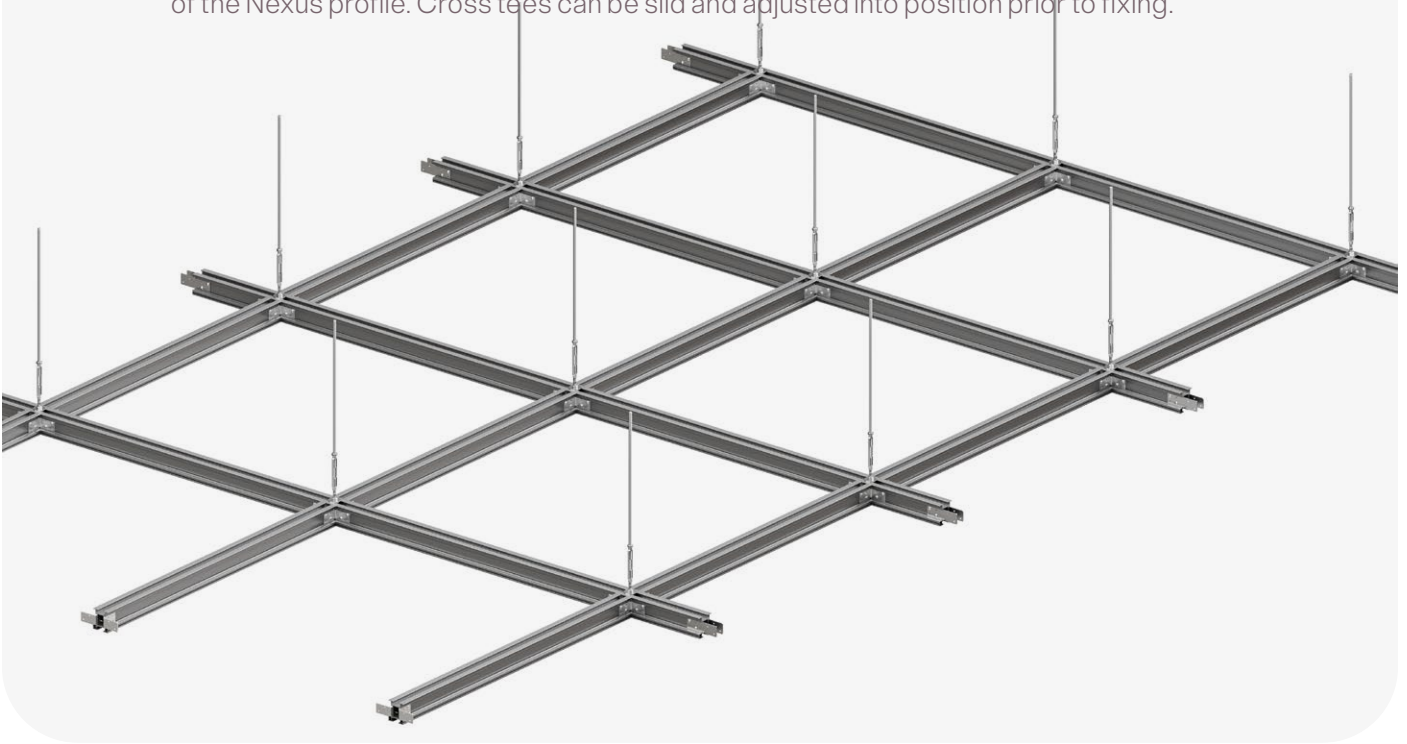

## Step 4

Infill tiles are installed into the Nexus grid.

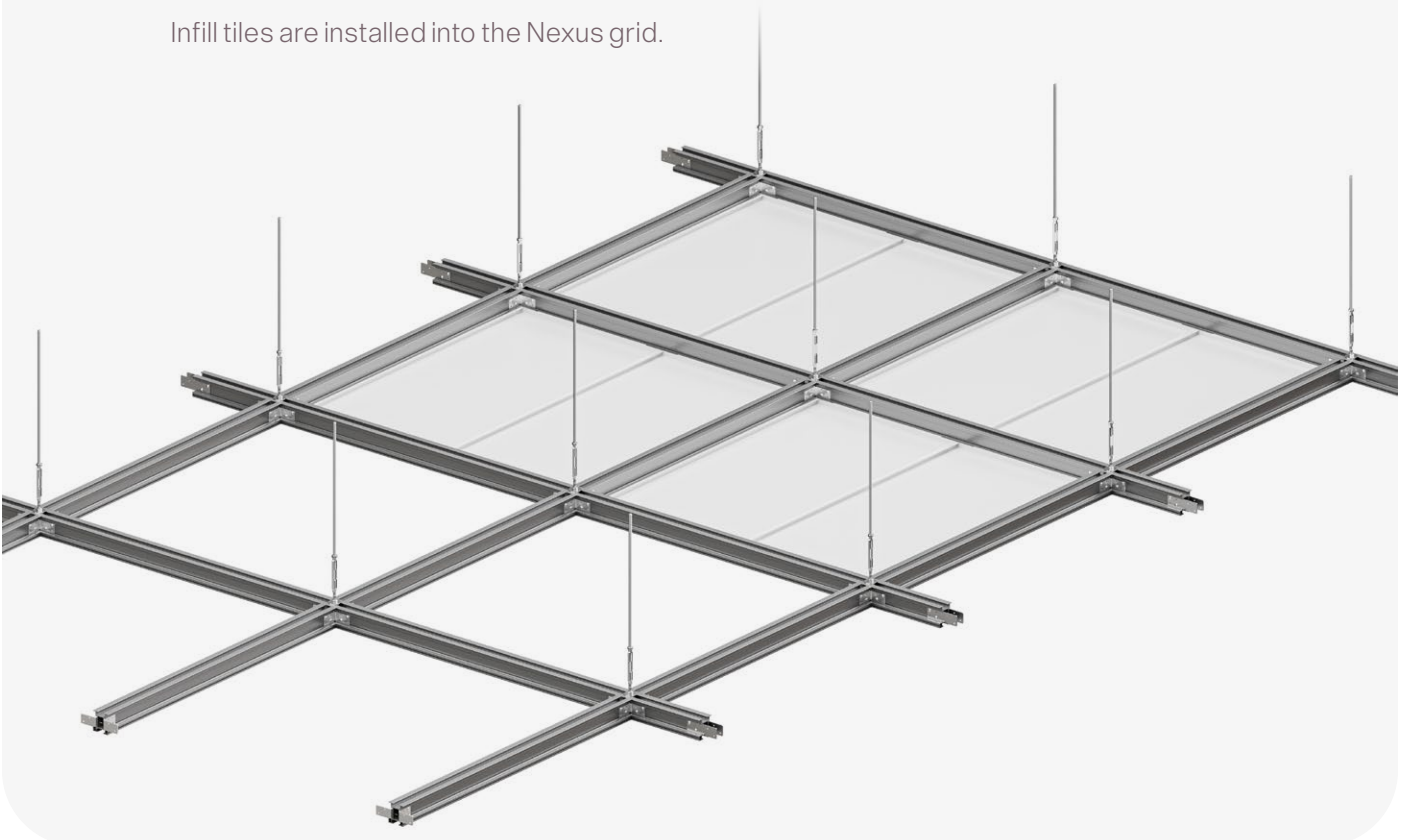


# Sustainability & Material Health

## SAS HORIZON

Nexus is now included in the SAS International Horizon project to reduce the embodied carbon of our products. Using renewable energy-powered electric arc furnaces, the embodied carbon of our standard system is lower by 58% and now contains over 90% recycled steel.

SAS Nexus  
Lay-In Plain Steel Tile

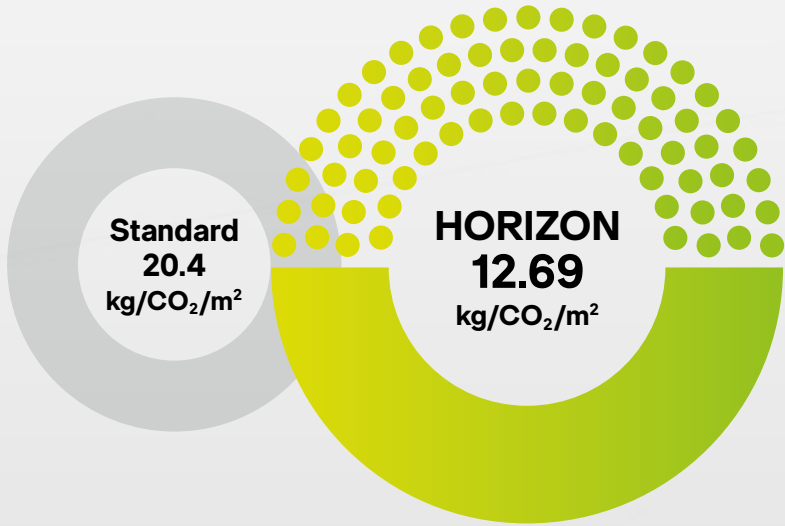

# Sustainability & Material Health



## MATERIAL HEALTH

**VOCs:** <math>0.5 \mu\text{g}/\text{m}^3</math> (tested in accordance with Indoor Comfort Gold and California Department of public health standards)

**Formaldehyde Class:** E1 accordance with BS EN13964:2014

**REACH / LBC Red List:** Product contains no substances on the authorisation, restriction or candidate list found on the current REACH SYHC or Red List to 0.1% or 100ppm

## SUSTAINABILITY

**Circularity:** Product suitable for reuse, refurbishment and repurposing

**Install and Disassembly:** Installation and disassembly guides available



INTERNATIONAL & UK [sasint.co.uk](http://sasint.co.uk) / IRE [sasint.ie](http://sasint.ie) / FR [sasint.fr](http://sasint.fr) /  
MENA [sasint.me](http://sasint.me) / AUS [sasint.au.com](http://sasint.au.com) / USA [sasint.us](http://sasint.us)